

# KONE CLEAR GLASS LUMINAIRE WITH DOWNLIGHT

**DELRAY  
LIGHTING  
INCORPORATED**

**620**



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

| Model# | Wattage             | Voltage                  | Option  |
|--------|---------------------|--------------------------|---|
|        | <b>26, 32 or 42</b> | <b>1-120V<br/>2-277V</b> | <b>EM</b> —Emergency battery (pendant only). Dimming only for items marked <b>◆</b> . Choose <b>D1, D3, D4, D5</b> or <b>D8</b> . (See Back Page) |


**Example:**

|      |    |   |    |
|------|----|---|----|
| 6202 | 26 | 1 | EM |
|------|----|---|----|


## KONE CLEAR PENDANT

Canopy mounts to standard J-box. Compact fluorescent electronic ballast fits inside fixture for easy access, metal halide ballast is in canopy. Pendant is 45" standard with push button adjustable aircraft cable. Finish is white with white power cord. Glass shade is clear for general illumination with clad aluminum downlight reflector for task lighting. Fixtures have a twist lock socket for secure, easy relamping. Dimming and emergency battery backup is available for CFL. U.L. listed for damp locations.

**6202 ◆**  
Fluorescent




**6202EM**  
Fluorescent

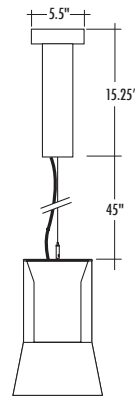

## KONE CLEAR SURFACE

Canopy mounts to standard J-box. Electronic ballast fits on backplate for easy access. Finish is white, with white power cord. The clear glass shade is removable without tools and is for general illumination, an interior clad aluminum downlight reflector for task lighting. Fixtures feature twist lock socket for secure, easy relamping. Dimming and emergency options are *not* available. U.L. listed for damp locations.

**6201**  
Fluorescent



**BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM**


MAR 2010

## FLUORESCENT


## BALLAST INFO

## OPTIONS

### 1-42W PLT



### CP DISTRIBUTION

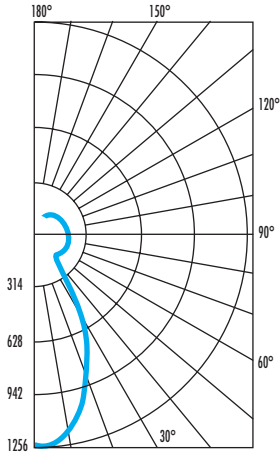

### COEFFICIENTS OF UTILIZATION

|    | % CEILING 80 (20% FLOOR) |    |    |
|----|--------------------------|----|----|
|    | % WALL 70                | 50 | 30 |
| 0  | 73                       | 73 | 73 |
| 1  | 65                       | 61 | 58 |
| 2  | 59                       | 54 | 49 |
| 3  | 54                       | 48 | 42 |
| 4  | 50                       | 43 | 37 |
| 5  | 46                       | 39 | 33 |
| 6  | 43                       | 35 | 30 |
| 7  | 40                       | 32 | 27 |
| 8  | 37                       | 29 | 24 |
| 9  | 35                       | 27 | 22 |
| 10 | 33                       | 25 | 20 |

### NOTES

#### 6202.42

1-42W triple tube  
 G24q-3 electronic twist lock socket  
 Total lumens: 3200  
 Spacing criteria: .78

### DIMMING

- Ballast mounted inside fixture.
- Dimming only available for items marked ♦ on page 1.
- Voltage *must* be specified.
- Controls lumen output down to  $\pm 5\%$ .
- Compatible dimmers required for all ballasts.
- **D1** Lutron Compact SE for 26 or 32W lamp.
- **D3** Advance Mark X for 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to  $\pm 1\%$ .

### EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=18.75"

**AL**-Acrylic Lens. For security and food service installations. Use with CFL lamps *only*.

