

1 MOUNT





Mount back plate to octagonal box.

Attach cover plate to back plate with flathead screws.

Attach ballast compartment to cover plate with Allen head screws.


For Dimming Fixtures, this canopy must be used.
Pendant length should not exceed four feet.

On fixtures with **Emergency Battery Backup**, Delray uses a combination of both canopy types. The top portion houses the ballast and the lower cylinder has been lengthened six inches to house the battery system.

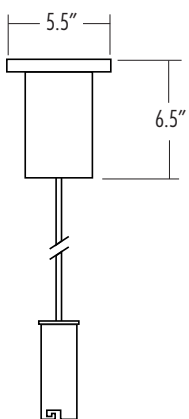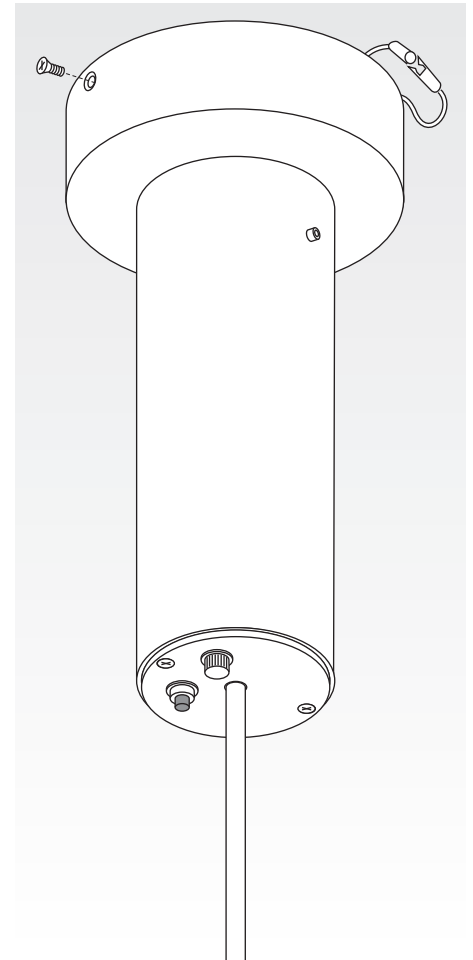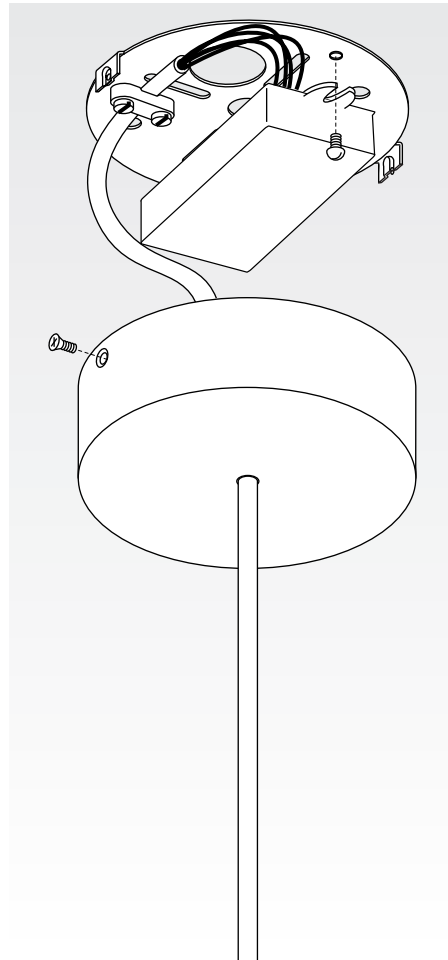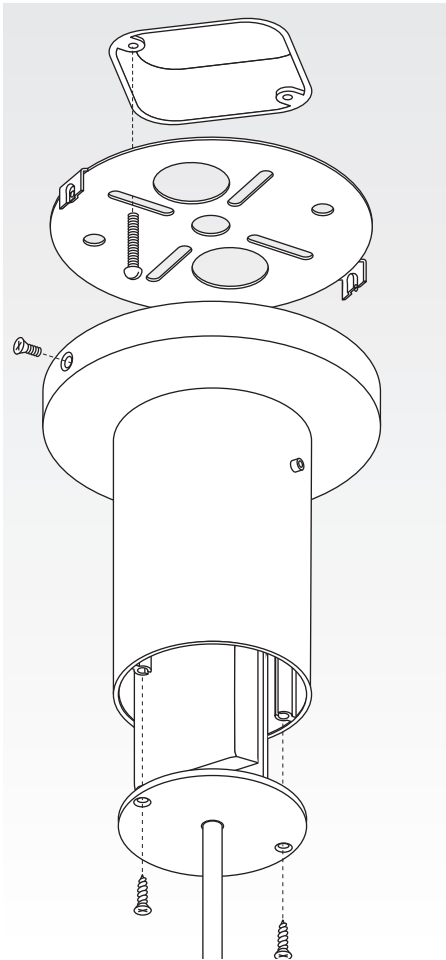


Available on these fixtures:

2072	2322
2142	2342
2272	2362
2292	2382

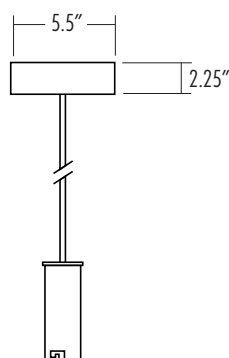


Available on these fixtures:

2077	2327
2147	2347
2277	2367
2297	2387

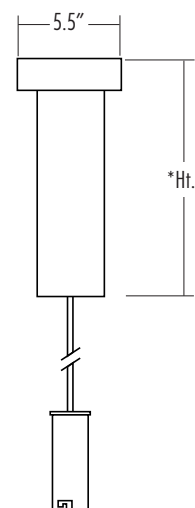

*15.25" for 650 lumen **EM**
*18.75" for 1300 lumen **EM13**





2 ADJUST PENDANT LENGTH

Remove upper nuts under pendant cover and slide socket assembly down out of holder. Loosen the screws on the strain relief and adjust pendant to the desired length.

3 ATTACH SHADE

For fixtures with shades, slide the shade over the bolts, with the spacers beneath the shade, and secure with cap nuts. Install with shade curved downward (as shown at right).

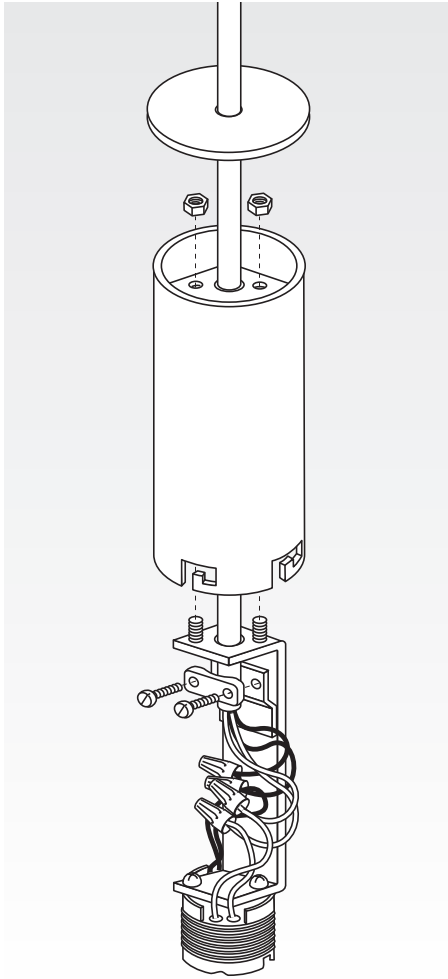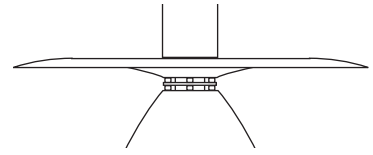

4 ATTACH LUMINAIRE

Attach socket holder by inserting the four reflector/glass assembly prongs into the slots on the socket holder and twist dropping into place.

TWIST LOCK SOCKET

Push lamp in and twist clockwise to lock into place.

