

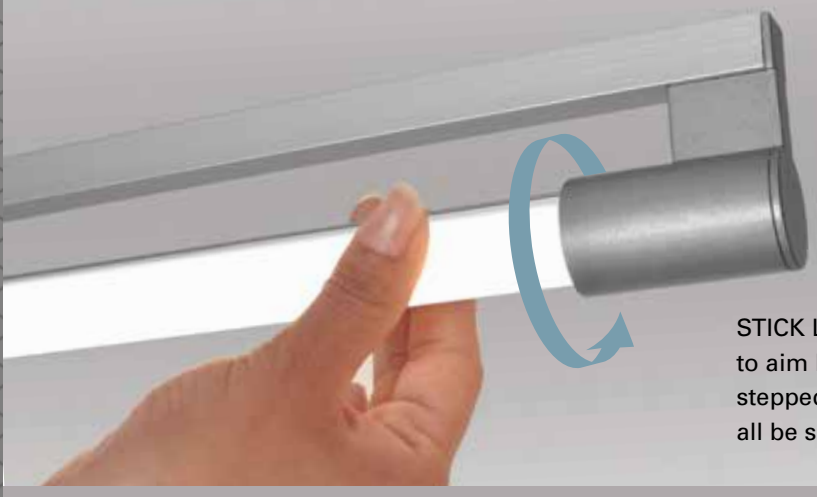
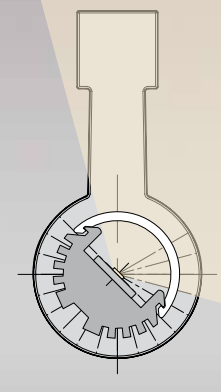
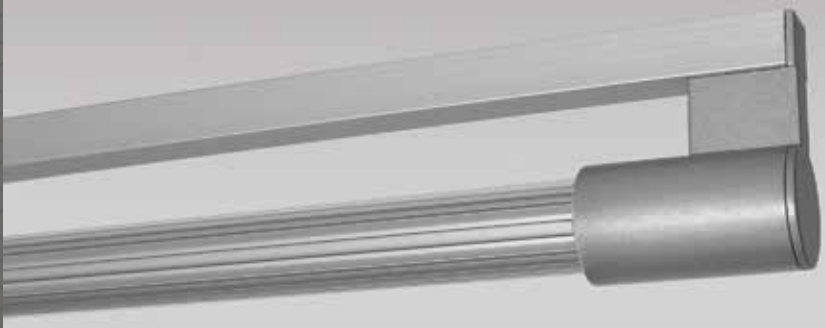
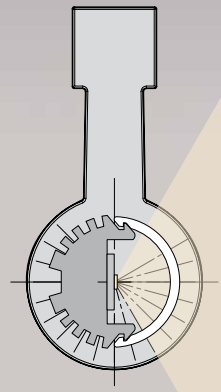


STICK ADJUSTABLE LED

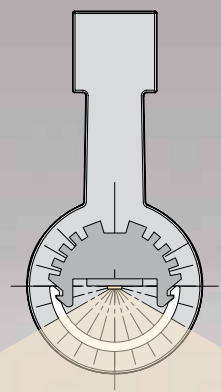

STICK LED's directional lamp rotates 270°, to aim light where you need it; in 15° stepped increments, so multiple fixtures may all be set at the same beam angle.

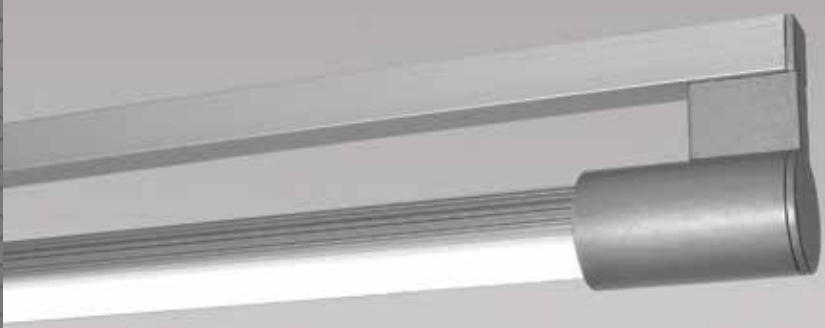

STICKLED



LUMENS / WATTS

4 ft. lamp

	HI	LO
Lumens	4,200	2,100
Watts	28	14

Single Pendant



Single Rail



Single Surface



Double Rail




Double Pendant



Wall Arm Mount
(remote driver install shown)




TRIM OPTIONS

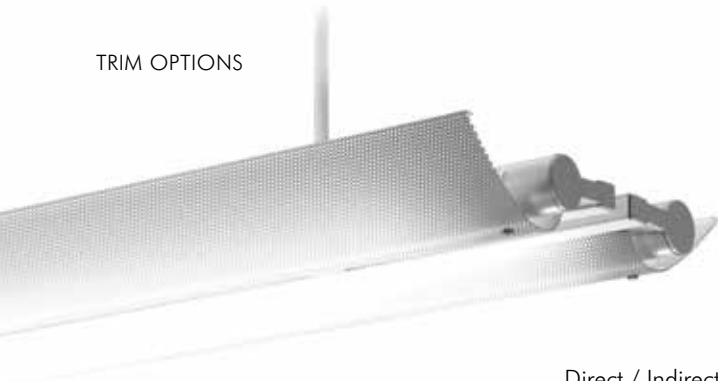

Direct / Indirect



Asymmetrical

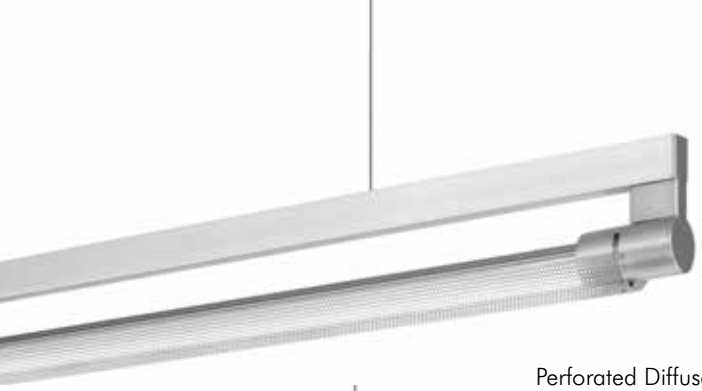

Perforated Diffuser




Direct / Indirect




Louvered


LAMP POSITION SUGGESTIONS

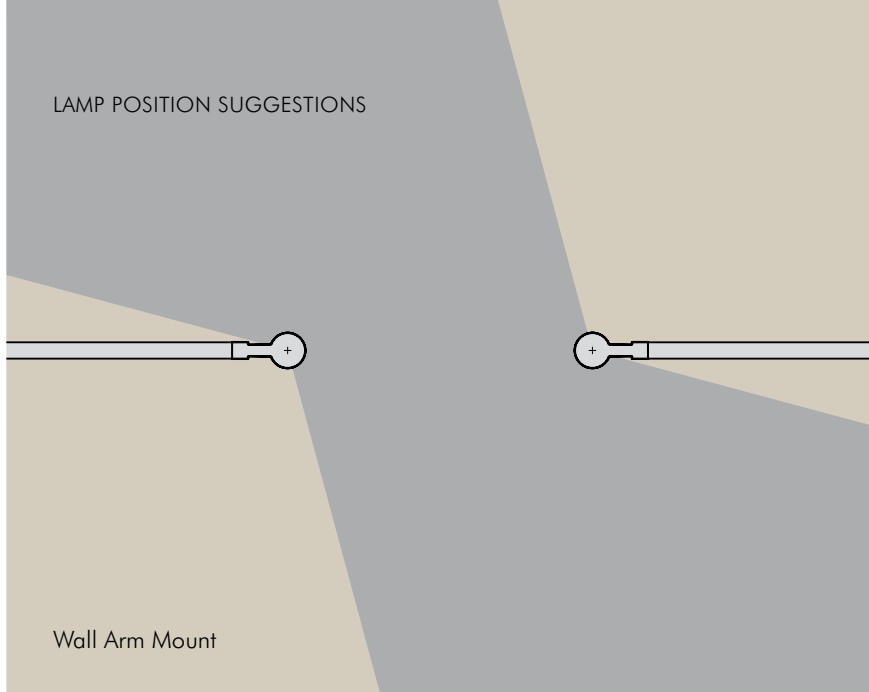

Wall Arm Mount

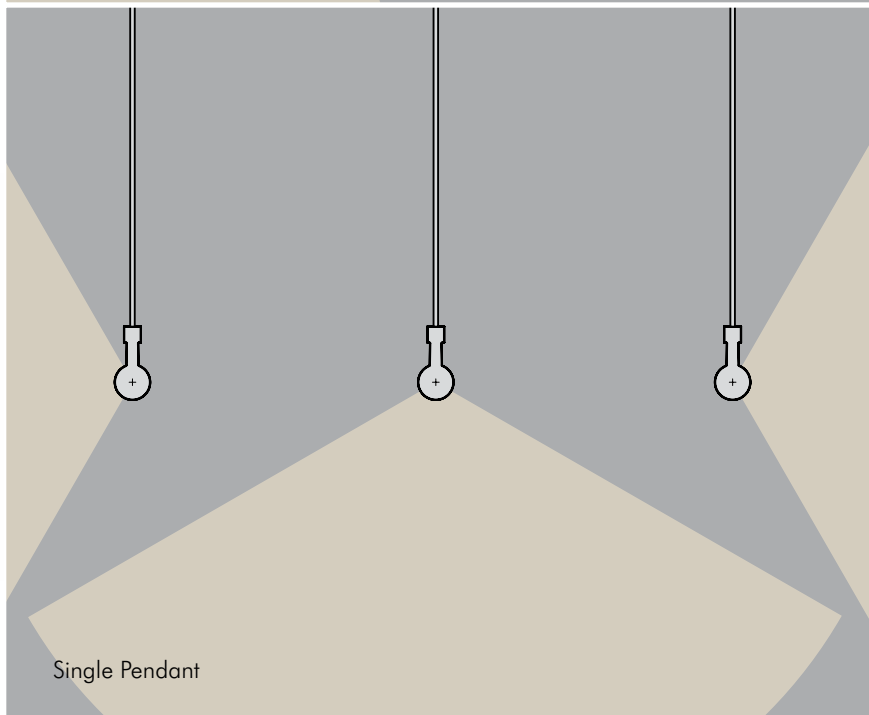

Single Pendant

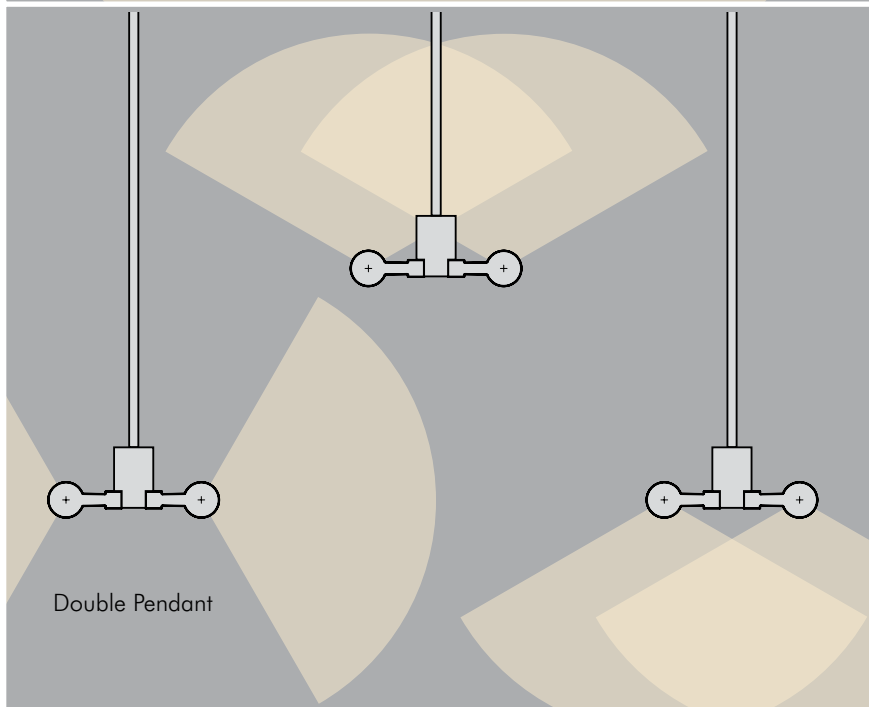


Double Pendant

STICK LED mount configurations


SLW51: stand-alone surface single lamp



SLT4: stand-alone, pendant, or continuous run

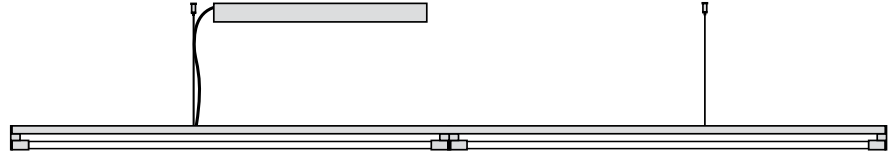


SLT6: rail mount pendant

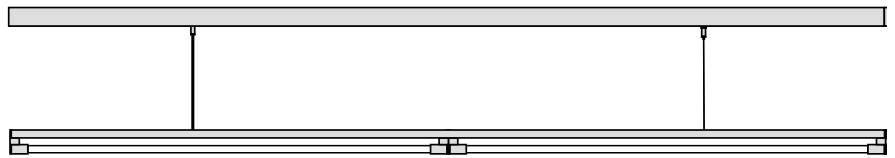

SLT7: rail mount, surface



SLW6: rail mount pendant, double lamp

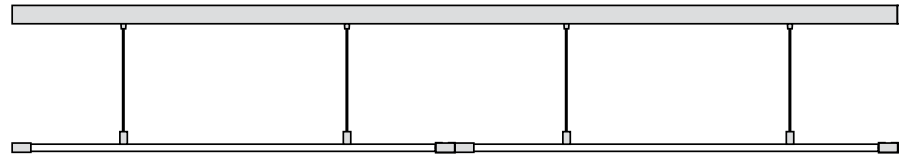

SLW7: rail mount surface, double lamp



SLT9: rail mount cantilever, single lamp

