


6" DOUBLE LAMP RETRO-FIT WALLWASHER

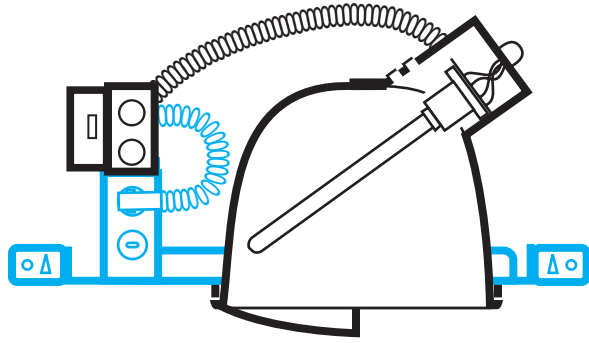

**DELRAY
LIGHTING
INCORPORATED**

**R
W
6
2
0
0**

SPECIFICATION INFORMATION

RETRO SYSTEM

Installs into existing downlights mounting frame, J-box, and mounting hardware. Consists of precisely designed reflector; lampholder with socket, flex, cap and wire; and ballast attached to J-box. (Voltage options must be specified). Accessory mounting clips are not required for all installations, however when needed specify mounting clip **MC** from accessories column. (See clip spec page for further information).

REFLECTOR

Reflector is available in thirty degree (.30) cutoff for general illumination. Finishes are **A**—Clear Alzak® Haze or **G**—Wheat Alzak® Haze for anodized, specular, durable and anti-iridescent reflectors.

BALLAST

Electronic ballasts use 4 pin lamps and provide program start, .98 power factor with THD<10%. Outboard mounting provides quiet cool operation. Supplied standard in 120V and 277V. Dimming ballast **D3** controls lumen output down to ±5% and is available for 2-18 and 2-26 watt only; compatible with incandescent dimmers.

ELECTRICAL

Allows 4-in / 4-out #12 AWG conductors rated at minimum 90° C. For use in damp locations. J-box and ballast are accessible through fixture. U.L. Classified for fluorescent retro-fits.

ACCESSORIES

AL—Acrylic security lens
B—Black baffle
G—Wheat Alzak Haze reflector
D3—Dimming ballast for 2-18W and 2-26W only
JM/UM—J-box mount (see options)
MC1—Mounting clips for high hat style housings like H7, R10, and MX7.
MC2—Mounting clips for die cast plaster frames.
MC4—Bottom feed clips.
MC5—Slide clips for flat plaster frames.
MC6—Bottom feed clips for die cast aluminum mounting frames.
OT3—White oversize trim ring
P—Trim flange painted white
QC—Quick connect screw-in cap
RP—Remodel pan

ORDERING INFORMATION

LAMPS

2-13 13W twin tubes
2-18 18W quad tubes
2-26 26W quad tubes

120V ELECT.

RW6213.1E 2-13W quad tubes
RW6218.1E 2-18W quad tubes
RW6226.1E 2-26W quad tubes

277V ELECT.

RW6213.2E 2-13W quad tubes
RW6218.2E 2-18W quad tubes
RW6226.2E 2-26W quad tubes

SUBMITTAL INFORMATION

TYPE:

PROJECT:


NOTES:

DESCRIPTION:

BURBANK,
 CALIFORNIA,
 91505
 WWW.
 DELRAY
 LIGHTING.
 COM


2-18 WATT QUAD TUBE

RW6218



2-26 WATT QUAD TUBE

RW6226



NOTES

RW6218

Wall Washer

2-18W quad tube
G24d-2 socket
G24q-2 electronic socket
Total lumens: 2500
FC (RW6213) x 1.4

RW6226


Wall Washer

2-26W quad tube
G24d-3 socket
G24q-3 electronic socket
Total lumens: 3600
FC (RW6213) x 2.0

ACCESSORIES




AL—Acrylic Security Lens




OT6—Oversize Trim Ring

Mounting Brackets



JM—Box mount



UM—Box mount

Reflector Clips



MC1—Top mount




MC2—Top mount



MC4—Bottom mount



MC6—Bottom mount



MCX—Extender clip

INPUT WATTS

STANDARD

Wattage	# of Lamps	Input Watts
13W	1	16
	2	29
18W	1	20
	2	39
26W	1	29
	2	54

DIMMING (Advance Mark 10)

Wattage	# of Lamps	Input Watts
18W	1	22
	2	43
26W	1	31
	2	58