

## ED17 CMH GLASS PENDANT LUMINAIRE



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

Model	Finish	Glass	Wattage	Voltage	Option
<b>1402</b>	<b>S</b> -Silver <b>W</b> -White	<b>R</b> -Red <b>O</b> -Opal	<b>70, 100</b> or <b>150</b>	<b>1</b> -120V <b>2</b> -277V	<b>QZ</b> -Quartz Restrike (See back page)

**Example:**

1402	S	R	70	1	QZ
------	---	---	----	---	----

**DELRAY**  
**LIGHTING**  
INCORPORATED

**1402**

### RED PENDANT

Canopy mounts to all standard J-boxes. Extruded aluminum ballast housing slides down for easy access to electronic ballasts.


Supplied with 6 ft. adjustable power cord and aircraft cables, silver braided power cord with silver finish fixtures, white cord with white finish. Additional lengths are available (must be specified).

Glass shade is red or opal exterior with matte opal interior.

UL/cUL listed for damp locations.

### OPTICS


ED17 ceramic metal halide lamp, coated and rated for open fixtures, is required. Color temperature is 3000 and 4000K.

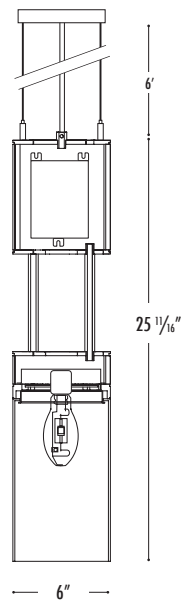

**BURBANK,**  
**CALIFORNIA,**  
**91505**  
**WWW.**  
**DELRAY**  
**LIGHTING.**  
**COM**

**ED17****OPTIONS****1-150W**

**QZ**-Quartz Restrike available with 70, 100 and 150W models only. Voltage must be specified.

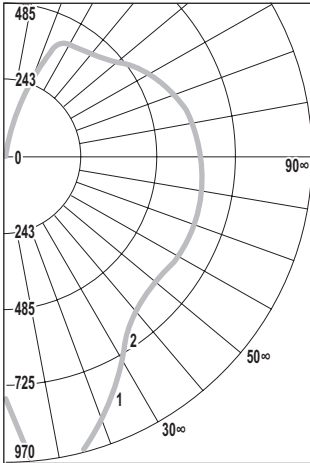**CP DISTRIBUTION****COEFFICIENTS OF UTILIZATION****% CEILING 80 (20% FLOOR)**

% WALL	70	50	30
0	67	67	67
1	57	53	49
2	51	45	40
3	46	39	33
4	42	34	28
5	38	30	24
6	35	26	21
7	32	24	18
8	30	21	16
9	28	20	14
10	26	18	13

**NOTES****4102.1150**

1-150W ED17, coated  
 Medium base socket  
 Total lumens: 11,900  
 Efficiency: 61.5%