

SWING T5 2-PIECE 115° PERFORATED DIFFUSER

12 SERIES

2-Piece 115° Perforated Diffuser



.9"



TYPE:

Model#

Voltage Options*

ORDER NUMBER:


1-120V SW200S
2-277V SW200W

PROJECT:

**See back page for details.*

Please review mounting info before ordering.

Surface Model #	Length	Wattage
SW52114.212	2'	14
SW52124.212	2'	24
SW53121.312	3'	21
SW53139.312	3'	39
SW54128.412	4'	28
SW54154.412	4'	54



Dimming/emergency not available on series SW5.

**DELRAY
LIGHTING
INCORPORATED**

SW5/12

**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**

JAN 2014

4' 54W

1-54W T5



SW44154.412


1-54W T5

G5 socket

Total lumens: 5000 mean

Total luminaire efficiency: 70.7%

CP DISTRIBUTION

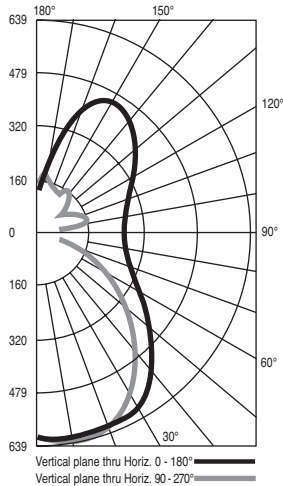

COEFFICIENTS

% CEILING 80 (20% FLOOR)


% WALL	70	50	30
0	77	77	77
1	68	64	61
2	61	55	50
3	55	48	42
4	50	42	35
5	46	37	31
6	42	33	27
7	39	29	23
8	36	27	21
9	33	24	18
10	31	22	17

SWING CONSTRUCTION

- Cast zinc aluminum alloy and aluminum extrusion construction.
- G5 twist-in lamp holders.
- UL /cUL listed for damp locations.
- Integral universal standard output 120/277V, 50/60 Hz electronic ballast.
- Back plate has *threaded 7/8"* opening for direct 16 AWG conduit feed.
- Dimming and **EM** not available.

MOUNTING

Swing features a die cast backplate with a threaded $\frac{1}{2}$ " conduit fitting at one end for direct connection to flexible conduit, which provides the smallest ballast compartment profile and avoids unsightly plates or covers on walls or ceilings. Use a third party $\frac{1}{2}$ " conduit fitting and maximum 14 AWG wire for communication to the ballast. Detailed installation instructions are available at www.delraylighting.com.

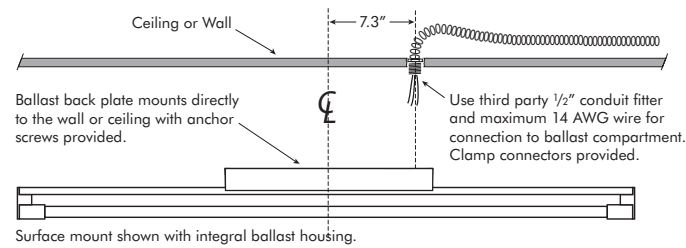

NOTE: POWER DOES NOT ENTER AT THE CENTER

OPTIONS

J-BOX MOUNT

Mounting the SW4 and SW5 series with standard ballast housing to a recessed J-box requires a 3" mud ring, the holes in line with the direction of the fixture. Order **SW200**, available in **S**-silver or **W**-white.

