

CFL GLASS PENDANT LUMINAIRE

DELRAY
LIGHTING
INCORPORATED

1405



TYPE:

PROJECT:

ORDER NUMBER:

Model	Finish	Glass	Lamps	Wattage	Voltage	Option
1405	S -Silver W -White	R -Red O -Opal	1 or 2	26, 32 or 42	1 -120V 2 -277V	Dimming: D3, D4, D5, D8 or D9. (See back page.)

Example:

1405	S	R	2	42	1	D3
------	---	---	---	----	---	----

RED PENDANT

Canopy mounts to all standard J-boxes, and houses ballast for 26/32/42W CFL lamps.


Supplied with 6 ft. adjustable power cord and aircraft cables, silver braided power cord with silver finish fixtures, white cord with white finish. Additional lengths are available (must be specified).

Glass shade is red or opal exterior with matte opal interior.

UL/cUL listed for damp locations.

OPTICS

Lamps are 26/32/42W triple tube, 4-pin compact fluorescent. Color temperatures are 27/30/35 or 41K.

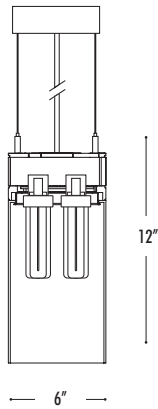

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

NOV 2011

FLUORESCENT


BALLAST INFO

2-42W TRT

DIMMING

- Voltage *must* be specified.
- Controls lumen output down to $\pm 5\%$.
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire 26, 32 or 42W lamp. 120V *only*.
- **D5** Advance Mark VII for 26, 32 or 42W lamp.
- **D8** Lutron Hi Lume for 26, 32 or 42W lamp. Controls lumen output down to $\pm 1\%$.
- **D9** Lutron Eco System for 26, 32 or 42W lamp.

CP DISTRIBUTION

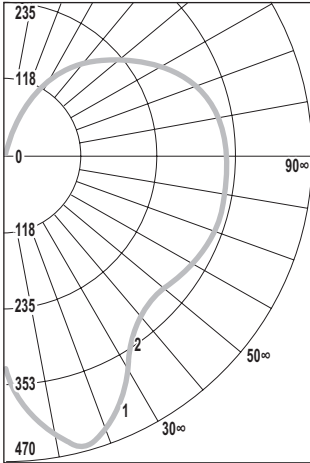

COEFFICIENTS OF UTILIZATION

% CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	63	63	63
1	54	50	46
2	48	42	37
3	43	36	31
4	39	32	26
5	36	28	22
6	33	25	19
7	30	22	17
8	28	20	15
9	26	18	13
10	24	17	12

NOTES

1405.242

2-42W triple tube
 G24q-2 electronic twist lock socket
 Total lumens: 6400 (2 lamps)
 Spacing criteria: .82
 Efficiency: 58.1%