

SWING T5 SINGLE LAMP SURFACE

DELRAY
LIGHTING
INCORPORATED

SW5/BARE




TYPE: **Model#** **Voltage** **Options***
ORDER NUMBER: **1-120V** **SW200S**
PROJECT: **2-277V** **SW200W**

**See back page for details.*

Please review mounting info before ordering.

Surface Model #	Length	Wattage
SW52114	2'	14
SW52124	2'	24
SW53121	3'	21
SW53139	3'	39
SW54128	4'	28
SW54154	4'	54



BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

4' 54W

1-54W T5



SW54154


1-54W T5 HO

G5 socket

Total lumens: 5000 mean

Total luminaire efficiency: 95.9%

CP DISTRIBUTION

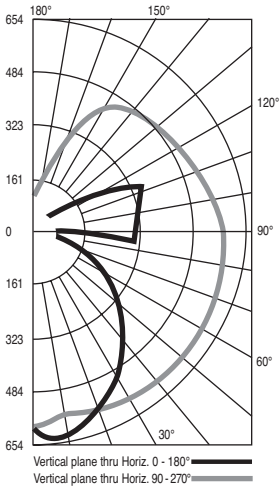

COEFFICIENTS

% CEILING 80 (20% FLOOR)


% WALL	70	50	30
0	97	97	97
1	83	78	73
2	74	66	59
3	67	57	49
4	61	50	41
5	55	44	35
6	51	39	31
7	47	35	27
8	43	32	24
9	40	29	21
10	38	26	19

SWING CONSTRUCTION

- Cast zinc aluminum alloy and aluminum extrusion construction.
- G5 twist-in lamp holders.
- UL /cUL listed for damp locations.
- Integral universal standard output 120/277V, 50/60 Hz electronic ballast.
- Back plate has *threaded* 7/8" opening for direct 16 AWG conduit feed.
- Dimming and **EM** not available.

MOUNTING

Swing features a die cast backplate with a threaded 1/2" conduit fitting at one end for direct connection to flexible conduit, which provides the smallest ballast compartment profile and avoids unsightly plates or covers on walls or ceilings. Use a third party 1/2" conduit fitting and maximum 14 AWG wire for communication to the ballast. Detailed installation instructions are available at www.delraylighting.com.

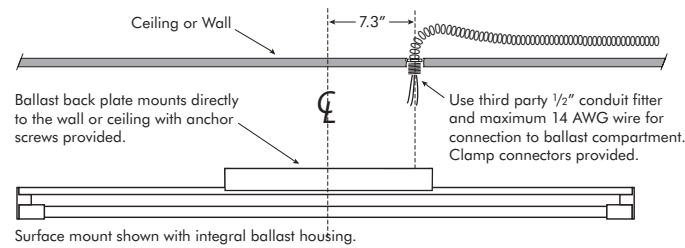

NOTE: POWER DOES NOT ENTER AT THE CENTER

OPTIONS

J-BOX MOUNT

Mounting the SW4 and SW5 series with standard ballast housing to a recessed J-box requires a 3" mud ring, the holes in line with the direction of the fixture. Order **SW200**, available in **S**-silver or **W**-white.

