

KONE CLEAR GLASS LUMINAIRE WITH DOWNLIGHT

**DELRAY
LIGHTING
INCORPORATED**

620



TYPE:

PROJECT:

ORDER NUMBER:

Model#	Wattage	Voltage	Option
	26, 32 or 42	1-120V 2-277V	EM —Emergency battery (pendant only). Dimming only for items marked ◆ . Choose D3, D4, D5, D8 or D9 . (See Back Page)


Example:

6202	26	1	EM
------	----	---	----


KONE CLEAR PENDANT

Canopy mounts to standard J-box. Compact fluorescent electronic ballast fits inside fixture for easy access, metal halide ballast is in canopy. Pendant is 45" standard with push button adjustable aircraft cable. Finish is silver with braided power cord. Glass shade is opal inside, clear outside, for general illumination with clad aluminum downlight reflector for task lighting. Fixtures have a twist lock socket for secure, easy relamping. Dimming and emergency battery backup is available for CFL. U.L. listed for damp locations.

6202 ◆
Fluorescent




6202EM
Fluorescent

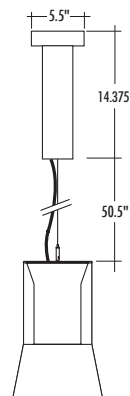

KONE CLEAR SURFACE

Canopy mounts to standard J-box. Electronic ballast fits on backplate for easy access. Finish is white, with white power cord. The clear glass shade is removable without tools and is for general illumination, an interior clad aluminum downlight reflector for task lighting. Fixtures feature twist lock socket for secure, easy relamping. Dimming and emergency options are *not* available. U.L. listed for damp locations.

6201
Fluorescent




**BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM**

FLUORESCENT


BALLAST INFO

OPTIONS

1-42W PLT



CP DISTRIBUTION

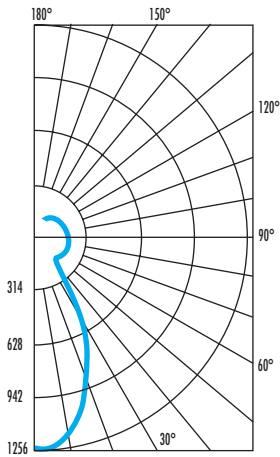

COEFFICIENTS OF UTILIZATION

	% CEILING 80 (20% FLOOR)		
	% WALL 70	50	30
0	73	73	73
1	65	61	58
2	59	54	49
3	54	48	42
4	50	43	37
5	46	39	33
6	43	35	30
7	40	32	27
8	37	29	24
9	35	27	22
10	33	25	20

NOTES

6202.42

1-42W triple tube
 G24q-3 electronic twist lock socket
 Total lumens: 3200
 Spacing criteria: .78

DIMMING

- Ballast mounted inside fixture.
- Dimming only available for items marked **◆** on page 1.
- Voltage *must* be specified.
- Controls lumen output down to $\pm 5\%$.
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume 1% for 26 or 32W lamp. Controls lumen output down to $\pm 1\%$.
- **D9** Lutron EcoSystem for 18, 26, 32 or 42W lamp. Controls lumen output down to $\pm 5\%$.

EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes. Ht.=15.25"
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes. Ht.=19"

AL-Acrylic Lens. For security and food service installations. Use with CFL lamps *only*.

