

CYLINDRO COLOR LED WITH OPAL ACRYLIC DIFFUSER

DELRAY
LIGHTING
INCORPORATED

650.DECO



TYPE:

PROJECT:

ORDER NUMBER:

Model#	LEDs	Voltage	Option
	R ed	1 -120V	BMR16 -50W MR16
	B lue	2 -277V	BAR111 -50W AR111
	SQ -RGB sequencer		BMR16LED -3.3W LED
	CW1 -Cool White, 1wrap		BDIM-W -for white LEDs
	WW1 -Warm White, 1wrap		BDMXMOD -DMX
	CW2 -Cool White, 2 wrap		interface module
	WW2 -Warm White, 2 wrap		

(see back page for details)

Example:

6501	SQ	1	BMR16
------	----	---	-------

Traxon Light Drive* (order separately)


BTRAXW (white)

BTRAXB (black)


CYLINDRO PENDANT

- Canopy mounts to standard 3" mud ring
- Aluminum housing unlocks with a screw for servicing.
- Electronic drivers and color sequencer fit inside fixture for easy access.
- Standard LED color options include red and blue, as well as RGB sequencing, controlled with a DMX 512 interface (**BDMXMOD**). Optional wall box control offered separately (see Traxon, back page.)
- All LED components are Osram Sylvania.
- 6' standard pendant, with push button adjustable aircraft cable.
- Silver finish, with steel braided power cord and opal acrylic diffuser.
- Optional low voltage downlights available, for task lighting.
- May be ordered with one central or multi-point mount canopy.
- U.L. Listed for dry locations.

6501
Central
Mount

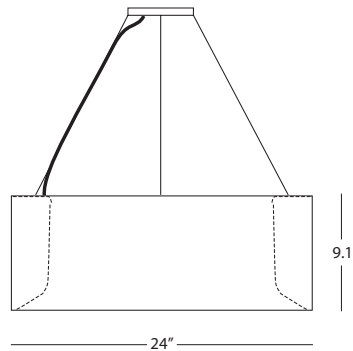


6502
Multi-Point
Mount

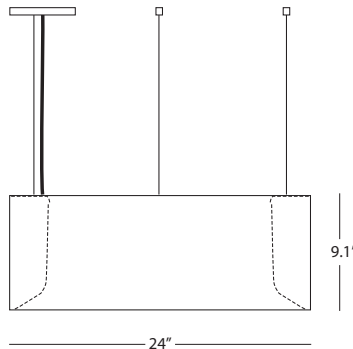


BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

LED

6501.CW2



CP DISTRIBUTION

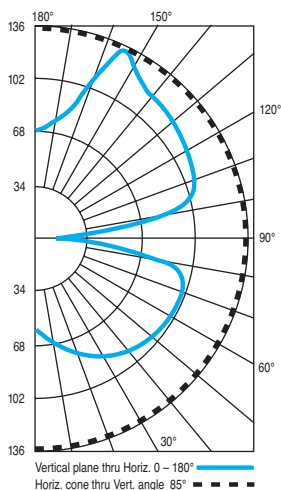

COEFFICIENTS

% CEILING 80 (20% FLOOR)			
% WALL	70	50	30
0	106	106	106
1	94	89	84
2	84	75	68
3	76	65	56
4	69	56	47
5	62	50	40
6	57	44	35
7	53	39	31
8	49	35	27
9	45	32	24
10	42	29	22

NOTES

6501.CW2

Cool White, 2-wrap LED
 Total lumens: 1,153

ACRYLIC DIFFUSER CLEANING

Warning: Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

CYLINDRO 650.DECO

Delray *Deco* white LEDs provide a CCT range decorative glow, and are available in two color temperatures: **WW**–Warm White (2900–3500° K) and **CW**–Cool White (4700–5500° K).

The white tape LEDs consume 4.4 watts and output 270 lumens per foot.

Delray will match white LEDs in up to six fixtures. (For projects requiring additional matched white fixtures, please see *Lux* series.)

Deco fixtures deliver subtle decorative effects with Delray's lowest lumens, wattage, and cost.

cUL listed for dry locations only.

RGB INTERFACE CONTROL OPTIONS

BDIM-White

- For white LEDs only.
- Osram part no. OT96W/24V UNV 0-10V supplied.
- Use with 0–10V, purple/gray wire analog dimmers.

BDMXMOD

- Osram part no. OTDMXRGB supplied.
- DMX control interface for RGB LED.
- Provides DMX control with protocols that meet USITT DMX-512A or DMX512 (DIN 56930-2). No converter is required. DMX controls by others.
- A second 4-conductor control cable to fixture canopy is supplied.

TRAXON LIGHT-DRIVE RGB (order separately) • See www.traxon-usa.com for details.

BTRAXW – white controller

BTRAXB – black controller (shown)

- Standalone, wall-mounted (12V power supply included) DMX controller for RGB LED that provides direct access to fixtures in two lighting zones.
- Tune color and brightness with the Light-Drive wheel.
- Two sequence modes enable continuous replay of all saved color settings, as well as a preset color-phase function, which can be adjusted in replay speed.
- Fully dimmable white mode button.




WATTS


Red	19W	CW/WW1	36W
Blue	16W	CW/WW2	72W
SQ	41W		

OPTIONS

BMR16–50W MR16
BMR16LED–3.3W LED
 Downlight



BAR111–50W AR111
 Downlight



WHITE LED OPTIONS

White LEDs available in two configurations:

CW/WW1–single wrap for ambient glow (36W).

CW/WW2–double wrap for ambient glow and illumination (72W).