


## CYLINDRO COLOR LED WITH OPAL ACRYLIC DIFFUSER

**DELRAY**  
**LIGHTING**  
INCORPORATED

**650**



**TYPE:**

**PROJECT:**

**ORDER NUMBER:**

Model#	LEDs	Voltage	Option
	<b>R</b> ed	<b>1</b> -120V	<b>BMR16</b> -50W MR16
	<b>B</b> lue	<b>2</b> -277V	<b>BAR111</b> -50W AR111
	<b>SQ</b> -RGB sequencer		<b>BMR16LED</b> -3.3W LED
	<b>W1</b> -Cool White, 1wrap		<b>BDIM</b> -3 channel analog interface
	<b>W2</b> -Cool White, 2 wrap (see back page for details)		<b>BDMOD</b> -DMX interface module
			<b>BTRAXW</b> -white
			<b>BTRAXB</b> -black


**Example:**

6501	SQ	1	BMR16
------	----	---	-------


### CYLINDRO PENDANT

- Canopy mounts to standard 3" mud ring
- Aluminum housing unlocks with a screw for servicing.
- Electronic drivers and color sequencer fit inside fixture for easy access.
- Color sequencer option has speed control knob on top of fixture; or fixture may be ordered with a dimmer or DMX controller. (See back page.)
- All LED components are Osram Sylvania.
- 6' standard pendant, with push button adjustable aircraft cable.
- Silver finish, with steel braided power cord and opal acrylic diffuser.
- Optional low voltage downlights available, for task lighting.
- May be ordered with one central or multi-point mount canopy.
- U.L. Listed for dry locations.

**6501**  
Central  
Mount

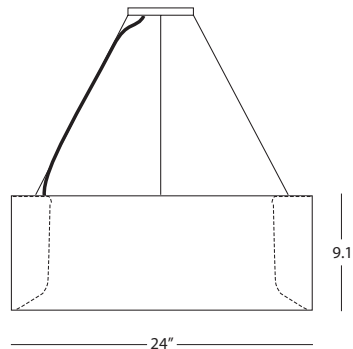

**6502**  
Multi-Point  
Mount

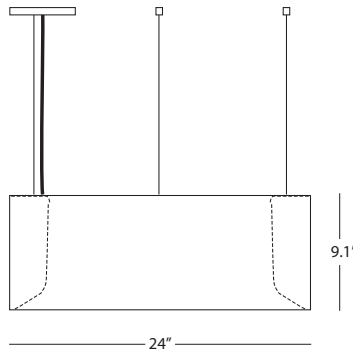


**BURBANK,**  
**CALIFORNIA,**  
**91505**  
**WWW.**  
**DELRAY**  
**LIGHTING.**  
**COM**

NOV 2011


## LED

54W




## DOWNLIGHT

**BMR16**—50W MR16  
**BMR16LED**—3.3W LED  
Downlight



**BAR111**—50W AR111  
Downlight



## RGB INTERFACE CONTROL OPTIONS

### SEQUENCER OPTIONS

- Osram part no. OTRGBSEQUENCER supplied.

### BDIM

- Osram part no. OTRGBDIM supplied.
- Dimming control interface for RGB LED that synchronizes the color in multiple fixtures.
- Colors are mixed manually by adjusting three 0-10V wall dimmers, or three 100K Ohm potentiometers. 0-10V converter is required for DMX control. Additional 18/4 control cable, from fixture to canopy, is supplied. Controls by others.

### BDMXMOD

- Osram part no. OTDMXRGB supplied.
- DMX control interface for RGB LED.
- Provides DMX control with protocols that meet USITT DMX-512A or DMX512 (DIN 56930-2). No converter is required. DMX controls by others.
- A second 3-conductor control cable to fixture canopy is supplied.

## WATTS

**Red** 19W  
**Blue** 16W  
**SQ** 41W

**W1** 36W  
**W2** 72W

## WHITE LED OPTIONS

Cool White LEDs available in two configurations:

**W1**—single wrap for ambient glow (36W).

**W2**—double wrap for ambient glow and illumination (72W).

## ACRYLIC DIFFUSER CLEANING

**Warning:** Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

## TRAXON LIGHT-DRIVE RGB

**BTRAXW**—white controller  
**BTRAXB**—black controller (shown)

Standalone, wall-mounted, plug 'n' play (12V power supply included) DMX controller for RGB LED that provides direct access to fixtures in two lighting zones. Tune color and brightness with the Light-Drive wheel. Six memory slots allow you to save individual settings that can be recalled at the touch of a button or by remote control. Two sequence modes enable continuous replay of all saved color settings, as well as a preset color-phase function, which can be adjusted in replay speed. Fully dimmable white mode button. See [www.traxon-usa.com](http://www.traxon-usa.com) for details.



3.93"

6.69"