


## 8" HORIZONTAL DOUBLE LAMP LOUVERED DOWNLIGHT

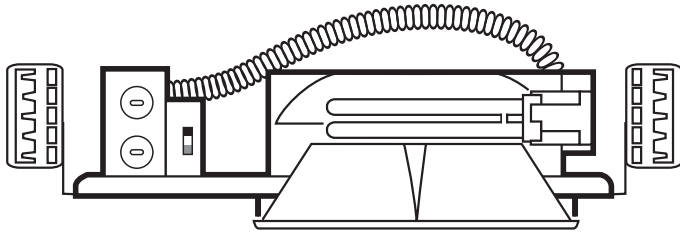

Clear Alzak® Haze  
4 Cell Louver

### SPECIFICATION INFORMATION

#### HOUSING ASSEMBLY

- Pre-coated galvanized steel mounting frame and J-box.
- Flat one piece 27" bar hangers (supplied) provide for off center mounting.
- .063 aluminum lampholder securely fastens to reflector, provides thermally efficient operation.
- Ground wire included (prewired).

#### REFLECTOR

- 4 cell parabolic louver inserts into housing with spring clips for easy re-lamping. Louver provides shielding that increases light output between 0-15°, while eliminating glare at 30° of cutoff.

#### BALLAST

- Standard in universal voltage 120V through 277V.
- Thermally protected rapid start electronic ballasts use 4-pin lamps
- .99 power factor with THD < 10%.
- End of lamp life protection.

#### ELECTRICAL

- Allows 4-in/4-out #12 AWG conductors rated at minimum 90° C.
- J-box and ballast are both accessible through fixture.
- U.L. listed for use in damp locations.

#### ACCESSORIES

- **CHANGER** for re-lamp cup
- **P**-trim flange painted white
- **CP**-Chicago plenum
- **FS**-inline fuse

#### DIMMING

- Voltage *must* be specified.
- Controls lumen output down to ±5%.
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 18 or 26W lamp.
- **D4** Lutron Tu-Wire for 26W lamp. 120V *only*.
- **D5** Advance Mark VII for 18 and 26W lamp.
- **D8** Lutron Hi-Lume for 26W lamp. Controls lumen output down to ±1%.
- **D9** Lutron Eco System for 18 and 26W lamp.

#### EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes.
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes.

### ORDERING INFORMATION

#### LAMP

- 2-13** 13W quad tube
- 2-18** 18W quad tube
- 2-26** 26W quad tube

#### 120V ELECTRONIC

- LUX2131E** 2-13W quad tube
- LUX2181E** 2-18W quad tube
- LUX2261E** 2-26W quad tube

#### 277V ELECTRONIC

- LUX2132E** 2-13W quad tube
- LUX2182E** 2-18W quad tube
- LUX2262E** 2-26W quad tube

### SUBMITTAL INFORMATION

**TYPE:**

**PROJECT:**

**NOTES:**

**DESCRIPTION:**


**DELRAY  
LIGHTING  
INCORPORATED**

**LUX200**

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM

# CLEAR ALZAK 30°

## LUX200.A30




### CONE OF LIGHT

MTG. HT.	FC/0°	DIA.
4'	52	5.6
6'	23	8.4
8'	13	11.2
10'	8	14.0
12'	6	16.8

50% FC at edge

### CP DISTRIBUTION



### COEFFICIENTS OF UTILIZATION

	% CEILING 80 (20% FLOOR)		
	% WALL 70	50	30
0	60	60	60
1	58	56	55
2	55	53	52
3	53	51	49
4	51	48	46
5	49	46	44
6	47	44	41
7	45	42	39
8	43	39	37
9	41	37	35
10	38	34	31

### NOTES

#### LUX226

2-26W quad tube  
 G24q-3 electronic socket  
 Total lumens: 3600  
 Spacing criteria: 1.3  
 Efficiency: 35.7%