


STICK MEDIA SEAMLESS LINEAR LED



End Cap (1:2 scale)

TYPE: _____ ORDER NUMBER: _____ PROJECT: _____

Model	Length	LED	LO/HO	Drivers	Emergency	Options
ST1P—Pendant	2–2 ft.	W30	LO	BDIM-W11	EM7	SLRD
ST1PM—Pendant Middle	3–3 ft.	W35	HO		EM12	SP100
ST1S—Surface	4–4 ft.	W40				
ST1SM—Surface Middle	6–6 ft.					
	8–8 ft.			BDMXMOD		
		R				
		B				
		SQ				


Example:

Continuous Run Length (ft.): _____


BTRAXW—Traxon Light Drive* (enter quantity): _____

XP—Extra power cord (in inches; max. 25 ft.): _____

ST1P – 4 ft., Pendant

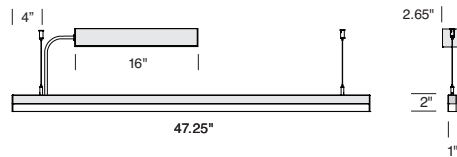

ST1S – 4 ft., Surface

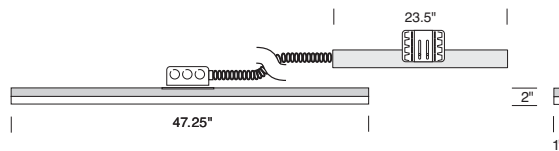

MEDIA CONNECTING SECTIONS



PENDANT



PENDANT MIDDLE

Model #	Size	Length	Model #	Size	Length
ST1P2	2 ft.	23.5"	ST1PM2	2 ft.	23.5"
ST1P3	3 ft.	35.4"	ST1PM3	3 ft.	35.4"
ST1P4	4 ft.	47.25"	ST1PM4	4 ft.	47.25"
ST1P6	6 ft.	70.8"	ST1PM6	6 ft.	70.8"
ST1P8	8 ft.	94.5"	ST1PM8	8 ft.	94.5"

DELRAY
LIGHTING
INCORPORATED

MEDIA LED


BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

4' LED

STIP4HOW40



CP DISTRIBUTION

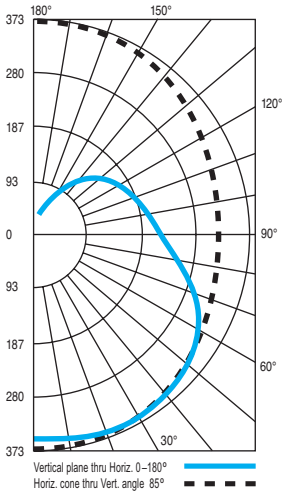

COEFFICIENTS

% CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	112	112	112
1	99	93	88
2	89	79	71
3	80	69	60
4	73	60	51
5	67	53	44
6	61	48	38
7	57	43	34
8	53	39	30
9	49	35	27
10	46	32	24

NOTES

STIP4HOW40

White LEDs
Total fixture lumens: 2162
CRI: 90.0
R9 ≥ 50.0

Warning: Do not clean with ammonia based cleaners (e.g. Windex®). Use only water or cleaners specifically formulated for cleaning plastics.

Note: Aircraft cable suspension not recommended for outdoor use where fixture will be exposed to water or subject to wind oscillation. Avoid use near HVAC vents, and near corrosive chemical vapors, such as swimming pools.

MEDIA LED CONSTRUCTION

ST1 CONSTRUCTION

- Extruded aluminum outer housing with U-shaped white frosted acrylic diffuser for wide beam spread. 8 ft. gray or white 18 AWG adjustable power cord and AC cables with push button grippers supplied, standard. Specify **XP** for additional length (25 ft. max.).
- Driver mounts to ceiling, conduit feed to any side. Replaces J-box for clean appearance in open ceiling installs.

WHITE LEDs

- Nichia Corp. NFSL757 linear board chips. 90 CRI.
- **W30** (3000K), **W35** (3500K), and **W40** (4000K) white color temperatures.

CUSTOM LUMEN OUTPUT

Factory-set custom reduced lumen output. Order **XL**. Specify lumens.


ETL listed for dry locations.

COLOR LEDS

- **Red**, **Blue** or **SQ**—RGB flexible 5050 tapelights.
- Constant voltage drivers are 12V for single color, 24V for RGB sequencer.
- RGB sequencer requires **BDMXMOD** DMX 512 interface.
- Optional DMX wall box control offered separately (see Traxon, below).

CONTINUOUS MOUNT INFORMATION

Middle sections have joiner on one end, open on the other.

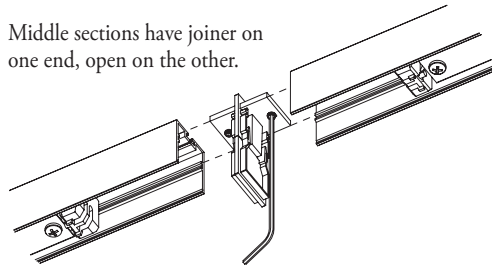

LED OPTIONS

D—standard supplied driver. Programmable, 0–10V, 120/277V, 50/60 Hz, 1% dimming.

OPTIONAL DRIVER

BDIM-W11


- Lutron EcoSystem LDE1 Series
- Dims to 1%
- Fade to off.

EMERGENCY BATTERY PACK

For 4' through 8' fixtures only. Ignites LEDs for 90 minutes. Adds additional length to driver housing. *Voltage must be specified.*

EM7—7W for 90 minutes.

EM12—12W for 90 minutes.

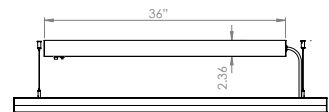


REMOTE DRIVERS


Drivers must be accessible after installation. Multiple driver housings must be mounted no closer than 4" apart side-by-side, or 1" apart end-to-end, to avoid overheating. Driver to canopy distance should not exceed 100 ft., using 10 AWG wire.

SLRD: Standard remote housing has no bar hangers and mounts to structure with screws. Dimensions: 24" length, 2.36" height, 2.65" width.

SLRDTB: Remote housing for T-bar ceiling includes bar hangers. Dimensions: 27" length, 3.4" height, 4.25" width.




EM/SLRDTB: Remote EM housing for T-bar ceiling includes bar hangers and remote test switch. Dimensions: 36" length, 3.4" height, 4.25" width.

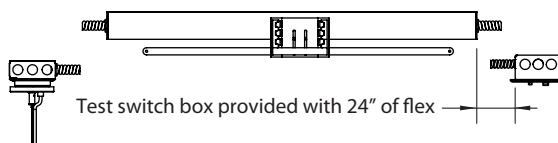

OPTIONAL J-BOX COVER

Cover plate mounts to maximum 4" square J-box. Ballast housing mounts to wall on top of cover plate, which may be painted to match ceiling or wall, and includes two mounting spacers to offset cover thickness. Order **SI00P**.



LM-79

LENGTH	Total Lumens	Delivered Lumens	Watts
2 ft. LO	1575	725	9W
2 ft. HO	2350	1081	13.5W
3 ft. LO	2350	1081	13.5W
3 ft. HO	3525	1622	20W
4 ft. LO	3150	1449	18W
4 ft. HO	4700	2162	27W