


6" CERAMIC METAL HALIDE DOWNLIGHT



Clear Alzak® Haze

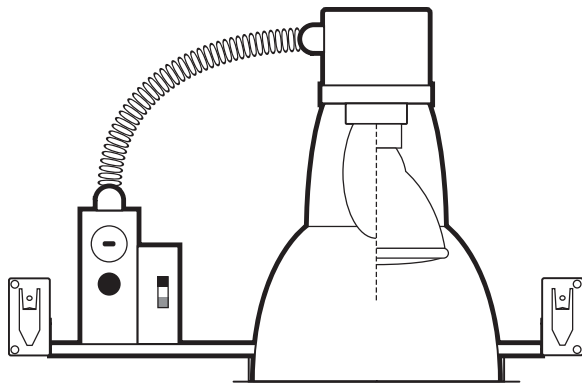

Wheat Alzak® Haze



Black Baffle

SPECIFICATION INFORMATION

HOUSING ASSEMBLY

- Pre-coated galvanized steel mounting frame and J-box.
- Telescopic bar hangers supplied, provides for off-center mounting on joists or T-bar.
- .063 aluminum lampholder securely fastens to reflector, provides thermally efficient operation.
- Self flange type trim for clean, contemporary appearance.
- Ground wire included (prewired).

REFLECTOR

- Thirty degree (30°) cutoff.
- Anodized, haze, durable and anti-iridescent.
- Finishes: **A**—Clear Alzak® Haze, and **G**—Wheat Alzak® Haze.

BALLAST

- Electronic ballast, universal voltage 120V through 277V.
- Thermally protected.
- .99 power factor with THD < 10%.
- End of lamp life protection.
- **Use only ceramic protected metal halide lamps.**

ELECTRICAL

- Allows 4-in/4-out #12 AWG conductors rated at minimum 90° C.
- J-box and ballast are both accessible through fixture.
- U.L. listed for use in damp locations.

ACCESSORIES

- **B**—black baffle
- **P**—trim flange painted white
- **CP**—Chicago plenum
- **OT6**—white oversize trim ring (adds 5/8" to flange)
- **FS**—inline fuse
- **Q**—quartz restrike

ORDERING INFORMATION

LAMP

- 1-35** 35W ED17, PAR30
1-70 70W ED17, PAR30

120V

- MH6035.A30.1** 35W 30°
MH6070.A30.1 70W 30°

277V

- MH6035.A30.2** 35W 30°
MH6070.A30.2 70W 30°

SUBMITTAL INFORMATION

TYPE:

PROJECT:

NOTES:

DESCRIPTION:


DELRAY
LIGHTING
 INCORPORATED

MH6000

BURBANK,
 CALIFORNIA,
 91505
 WWW.
 DELRAY
 LIGHTING.
 COM

CLEAR ALZAK 30°

MH6070.A30




CONE OF LIGHT

MTG. HT.	FC/O*	DIA.
6'	65	6.3
8'	43	8.2
10'	28	10.1
12'	19	12.0
14'	14	14.2

50% FC at edge

CP DISTRIBUTION



COEFFICIENTS OF UTILIZATION

% CEILING 80 (20% FLOOR)

% WALL	70	50	30
0	86	86	86
1	82	80	78
2	78	74	71
3	74	69	65
4	69	63	59
5	65	59	54
6	61	54	49
7	57	50	45
8	53	46	41
9	50	42	37
10	45	36	31

NOTES

MH6070.A30

1-70W ED17, coated
 Medium base socket
 Total lumens: 5000
 Spacing criteria: .9
 Efficiency: 55.1%

LAMP ORDERING INFORMATION

ED17



PAR30



PAR38



ED17 CERAMIC METAL HALIDE

CATALOG # 8ED70P

70W phosphor coated

PAR30 CERAMIC METAL HALIDE

CATALOG # 83035SP 83035FL

70W spot
 70W flood

PAR38 METAL HALIDE

CATALOG # 83870SP 83070FL 83070WFL

70W spot
 70W flood
 70W wide flood