

## SWING T5 SINGLE LAMP PENDANT AND SURFACE

**DELRAY  
LIGHTING  
INCORPORATED**

**SW4 & SW5 / BARE**




<b>TYPE:</b>	<b>Model#</b>	<b>Voltage</b>	<b>Options*</b>	<b>Dimming*</b>
<b>ORDER NUMBER:</b>		1-120V	SEM13	SD1
<b>PROJECT:</b>		2-277V	SMB SWRB	SD3 SD5 SD8

*\*See back page for details.*


**Please review mounting info before ordering.**

Pendant Model #	Length	Wattage
SW42114	2'	14
SW42124	2'	24
SW43121	3'	21
SW43139	3'	39
SW44128	4'	28
SW44154	4'	54

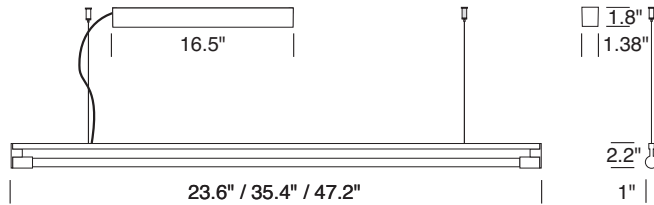

**NOTE:** For continuous runs, please see the ST4 series.

Surface Model #	Length	Wattage
SW52114	2'	14
SW52124	2'	24
SW53121	3'	21
SW53139	3'	39
SW54128	4'	28
SW54154	4'	54




*Dimming/emergency not available on series SW5.*

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM

JUN 2010

## 4' 54W


### 1-54W T5



### SW44154

1-54W T5 HO  
G5 socket  
Total lumens: 5000 mean  
Total luminaire efficiency: 95.9%

### CP DISTRIBUTION

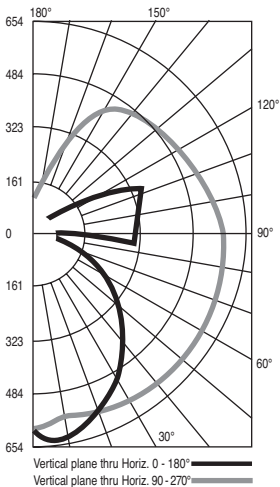

### COEFFICIENTS

% CEILING 80 (20% FLOOR)	% WALL 70	
	50	30
0	97	97
1	83	78
2	74	66
3	67	59
4	61	50
5	55	44
6	51	39
7	47	35
8	43	32
9	40	29
10	38	26

## SWING CONSTRUCTION

- Cast zinc aluminum alloy and aluminum extrusion construction.
- G5 twist-in lamp holders.
- UL /cUL listed for damp locations.
- Universal standard output 120/277V, 50/60 Hz electronic ballast, in a remote housing.
- Back plate has  $\frac{7}{8}$ " opening for direct conduit feed.

### SINGLE LAMP PENDANT



- 8 ft. field-adjustable air craft cable suspension, with push button glider.
- Adjustable 8' gray 600V, 18/5 AWG power cords.
- Dimming and emergency battery available.

### SINGLE LAMP SURFACE

- Integral universal standard output 120/277V, 50/60 Hz electronic ballast.
- Back plate has *threaded*  $\frac{7}{8}$ " opening for direct 16 AWG conduit feed.
- Dimming and EM not available.

### MOUNTING - SW4 AND SW5 SERIES


Swing features a die cast backplate with a threaded  $\frac{1}{2}$ " conduit fitting at one end for direct connection to flexible conduit, which provides the smallest ballast compartment profile and avoids unsightly plates or covers on walls or ceilings. Use a third party  $\frac{1}{2}$ " conduit fitting and maximum 14 AWG wire for communication to the ballast. Detailed installation instructions are available at [www.delraylighting.com](http://www.delraylighting.com).

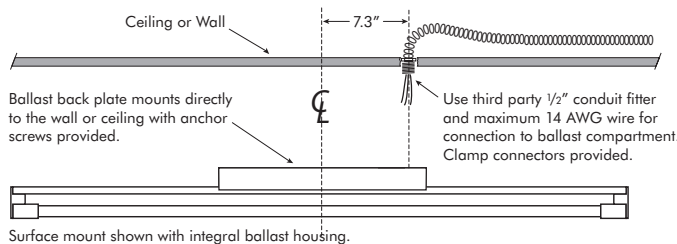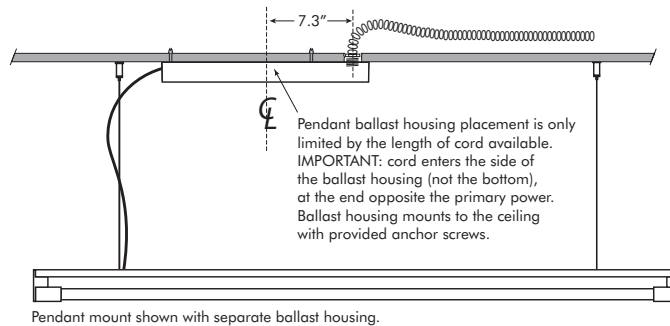

**NOTE: POWER DOES NOT ENTER AT THE CENTER**

### J-BOX MOUNT


Mounting the SW4 and SW5 series with standard ballast housing to a recessed J-box requires a 3" mud ring, the holes in line with the direction of the fixture. Order **SW200**, available in **S**-silver or **W**-white.

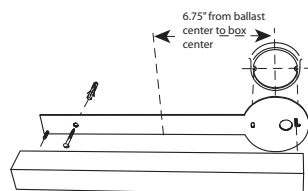

### BALLAST HOUSING BOX COVER

Order **S100P** to mount ballast to a recessed J-box. For use with the following options:

- **SEM13**
- Dimming




## OPTIONS

### DIMMING BALLASTS


Dimming ballast replaces standard canopy. All ballasts require compatible dimmers. *Note:* pendant distance should not exceed 3 feet. Voltage must be specified.

Cat. #	Type	Wattage
<b>SD1</b>	Lutron Eco 10	28/54
<b>SD3</b>	Advance Mark X	54
<b>SD5</b>	Advance Mark VII	54
<b>SD8</b>	Lutron Hi Lume FDB	28/54

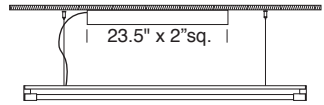


### EMERGENCY BALLASTS

Emergency ballast provides 1300 lumens for 90 minutes. Charge indicator light and test switch visible from below. (Remote test switch available.) Emergency not available for the SW5 series. Voltage must be specified. Order **SEM13**.

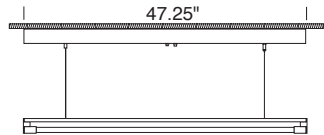


### RECESSED BALLAST

For suspended ceilings only. Order **SWRB**.

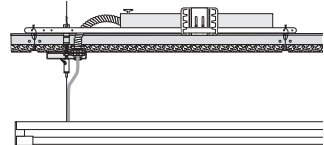

### THRU WIRING

Replaces standard ballast canopy and dimming canopy. Allows up to  $\frac{1}{2}$ " conduit with 3-in/3-out, #14 AWG. Order **SMB**.

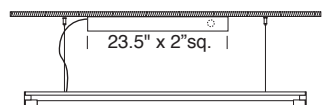

### SW5-PENDANT MOUNT

Adjustable cable grippers, round power feed canopy, and 8' cable and power cord included. (Cable and power cord may be ordered any length). Order **SW5PS**-silver or **SW5PW**-white.

