

## SWING T5 180° PERFORATED DIFFUSER

### 11 SERIES

180° Perforated Diffuser with  
360° Lamp Rotation



.9"



**TYPE:**

**Model#**

**Voltage Options\***

**ORDER NUMBER:**

1-120V **SW200S**  
2-277V **SW200W**


**PROJECT:**

*\*See back page for details.*

**Please review mounting info before ordering.**

### Surface

Model #	Length	Wattage
SW52114.211	2'	14
SW52124.211	2'	24
SW53121.311	3'	21
SW53139.311	3'	39
SW54128.411	4'	28
SW54154.411	4'	54



*Dimming/emergency not available on series SW5.*

**DELRAY**  
**LIGHTING**  
INCORPORATED

**SW5/11**

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM

JAN 2014

## 4' 54W

### 1-54W T5



#### SW44154


1-54W T5

G5 socket

Total lumens: 5000 mean

Total luminaire efficiency: 72.7%

### CP DISTRIBUTION

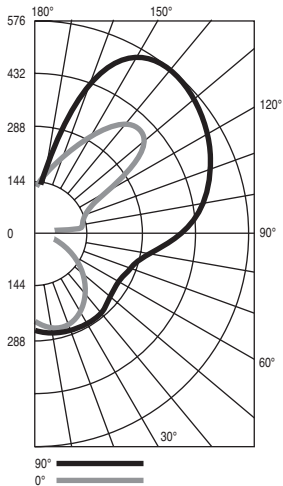

### COEFFICIENTS

#### % CEILING 80 (20% FLOOR)


% WALL	70	50	30
0	75	75	75
1	66	62	58
2	59	53	48
3	54	46	40
4	49	40	34
5	45	36	29
6	41	32	25
7	38	28	22
8	35	26	20
9	32	23	18
10	30	21	16

## SWING CONSTRUCTION

- Cast zinc aluminum alloy and aluminum extrusion construction.
- G5 twist-in lamp holders.
- UL /cUL listed for damp locations.
- Integral universal standard output 120/277V, 50/60 Hz electronic ballast.
- Back plate has *threaded 7/8"* opening for direct 16 AWG conduit feed.
- Dimming and **EM** not available.

### MOUNTING

Swing features a die cast backplate with a threaded  $\frac{1}{2}$ " conduit fitting at one end for direct connection to flexible conduit, which provides the smallest ballast compartment profile and avoids unsightly plates or covers on walls or ceilings. Use a third party  $\frac{1}{2}$ " conduit fitting and maximum 14 AWG wire for communication to the ballast. Detailed installation instructions are available at [www.delraylighting.com](http://www.delraylighting.com).

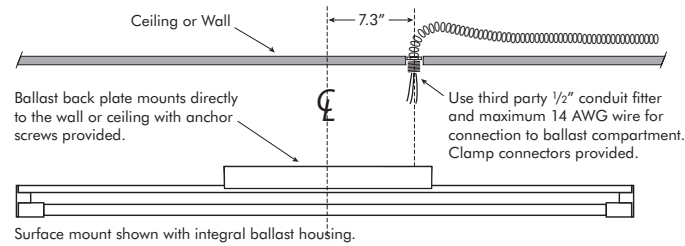

**NOTE: POWER DOES NOT ENTER AT THE CENTER**

## OPTIONS

### J-BOX MOUNT

Mounting the SW4 and SW5 series with standard ballast housing to a recessed J-box requires a 3" mud ring, the holes in line with the direction of the fixture. Order **SW200**, available in **S**-silver or **W**-white.

