



7.5" HORIZONTAL DOUBLE LAMP WALLWASHER

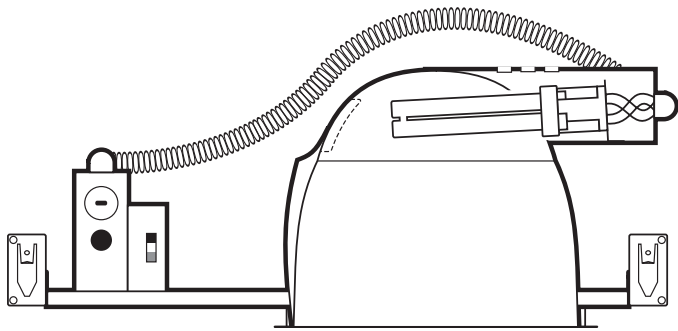

Clear Alzak®
Wallwash



Wheat Alzak®
Wallwash

SPECIFICATION INFORMATION

HOUSING ASSEMBLY

- Pre-coated galvanized steel mounting frame and J-box.
- Telescopic bar hangers supplied, provides for off-center mounting on joists or T-bar.
- .063 aluminum lampholder securely fastens to reflector, provides thermally efficient operation.
- Self flange type trim for clean, contemporary appearance.
- Ground wire included (prewired).

REFLECTOR

- Thirty degree (30°) cutoff.
- Anodized, haze, durable and anti-iridescent.
- Finishes: **A**—Clear Alzak® Haze, and **G**—Wheat Alzak® Haze.

BALLAST

- Standard in universal voltage 120V through 277V.
- Thermally protected rapid start electronic ballasts use 4-pin lamps
- .99 power factor with THD < 10%.
- End of lamp life protection.

ELECTRICAL

- Allows 4-in/4-out #12 AWG conductors rated at minimum 90° C.
- J-box and ballast are both accessible through fixture.
- U.L. listed for use in damp locations.

ACCESSORIES

- **AL**—acrylic food service lens
- **P**—trim flange painted white
- **CP**—Chicago plenum
- **OT7.5**—white oversize trim ring (adds 3/8" to flange)
- **FS**—inline fuse

DIMMING

- Voltage *must* be specified.
- Controls lumen output down to ±5%.
- Compatible dimmers required for all ballasts.
- **D1** Lutron Compact SE for 18, 26, 32 or 42W lamp.
- **D3** Advance Mark X for 18, 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 18, 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume for 26 or 32W lamp. Controls lumen output down to ±1%.
- **D9** Lutron Eco System for 26 or 32W lamp.

EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes

ORDERING INFORMATION

LAMP INFO

- 2-13** 13W quad tube
- 2-18** 18W quad tube
- 2-26** 26W quad tube
- 2-32** 32W triple tube

120V ELECTRONIC

- WH7.5213.A30.1E**
- WH7.5218.A30.1E**
- WH7.5226.A30.1E**
- WH7.5232.A30.1E**

277V ELECTRONIC

- WH7.5213.A30.2E**
- WH7.5218.A30.2E**
- WH7.5226.A30.2E**
- WH7.5232.A30.2E**

SUBMITTAL INFORMATION

TYPE:

PROJECT:

NOTES:

DESCRIPTION:


**DELRAY
LIGHTING
INCORPORATED**

WH7.5200

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM


2-13W TWIN TUBE

WH7.5213




2-18W QUAD TUBE

WH7.5218




2-26W QUAD TUBE

WH7.5226



2-32W TRIPLE TUBE

WH7.5232



FOOTCANDLES ON WALL FROM MULTIPLE UNITS

MTG. HT.	FOOTCANDLES		
	Δ	Units 3' apart	Δ
2'	34	30	34
4'	25	26	25
6'	14	15	14
8'	9	8	9
10'	5	5	5

Units 2.5 feet from wall and 3 feet apart
Based on 2-18 watt lamps

MTG. HT.	FOOTCANDLES		
	Δ	1'	2'
2'	28	21	9
4'	13	11	9
6'	6	5	5
8'	3	3	2
10'	1	1	1

1 unit 2.5 feet from wall in 1 foot increments
Based on 2-18 watt lamps

NOTES

**WH7.5218
Wall Washer**

2-18W quad tube
G24q-2 electronic socket
Total lumens: 2500
Efficiency: 32.7%

**WH7.5226
Wall Washer**

2-26W quad tube
G24q-3 electronic socket
Total lumens: 3600
Efficiency: 32.0%

**WH7.5232
Wall Washer**

2-32W triple tube
G24q-3 socket
Total lumens: 4800
Efficiency: 22.7%

**WH7.5242
Wall Washer**

2-42W triple tube
G24q-4 socket
Total lumens: 6400
Efficiency: 26.8%