



## 6" SINGLE LAMP EYELID WALLWASHER

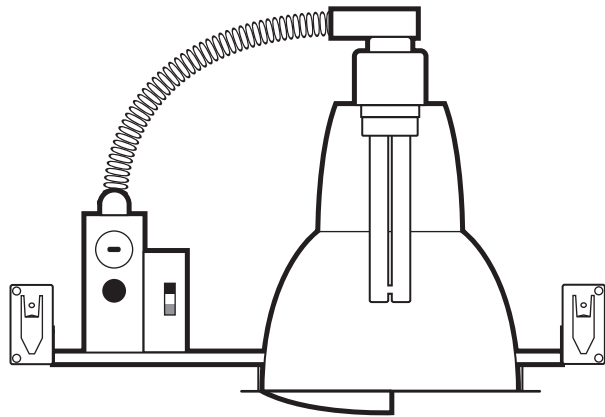

Clear Alzak® Haze  
Eyelid Wallwash

### SPECIFICATION INFORMATION

#### HOUSING ASSEMBLY

- Pre-coated galvanized steel mounting frame and J-box.
- Telescopic bar hangers supplied, provides for off-center mounting on joists or T-bar.
- .063 aluminum lampholder securely fastens to reflector, provides thermally efficient operation.
- Self flange type trim for clean, contemporary appearance.
- Ground wire included (prewired).

#### TWIST LOCK SOCKET

- Push lamp in and twist clockwise to lock into place.
- Lamp will not fall out.
- Relamp with pole (with Changer accessory).

#### REFLECTOR

- Thirty degree (30°) cutoff.
- Anodized, haze, durable and anti-iridescent.
- Finishes: **A**—Clear Alzak® Haze, and **G**—Wheat Alzak® Haze.

#### BALLAST

- Standard in universal voltage 120V through 277V.
- Thermally protected rapid start electronic ballasts use 4-pin lamps
- .99 power factor with THD < 10%.
- End of lamp life protection.

#### ELECTRICAL

- Allows 4-in/4-out #12 AWG conductors rated at minimum 90° C.
- J-box and ballast are both accessible through fixture.
- U.L. listed for use in damp locations.

#### ACCESSORIES

- **AL**—acrylic food service lens
- **B**—black baffle
- **CHANGER** for re-lamp cup
- **P**—trim flange painted white
- **CP**—Chicago plenum
- **OT6**—white oversize trim ring (adds 5/8" to flange)
- **FS**—inline fuse

#### DIMMING

- Voltage *must* be specified.
- Controls lumen output down to ±5%.
- Compatible dimmers required for all ballasts.
- **D3** Advance Mark X for 18, 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 18, 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume for 26 or 32W lamp. Controls lumen output down to ±1%.
- **D9** Lutron Eco System for 18, 26, 32 or 42W lamp.

#### EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes

### ORDERING INFORMATION

#### LAMP INFO

- 1-13** 13W quad tube
- 1-18** 18W quad tube
- 1-26** 26W quad tube
- 1-32** 32W triple tube
- 1-42** 42W triple tube

#### 120V ELECTRONIC

- WV6113.A30.1E**
- WV6118.A30.1E**
- WV6126.A30.1E**
- WV6132.A30.1E**
- WV6142.A30.1E**

#### 277V ELECTRONIC

- WV6113.A30.2E**
- WV6118.A30.2E**
- WV6126.A30.2E**
- WV6132.A30.2E**
- WV6142.A30.2E**

### SUBMITTAL INFORMATION

**TYPE:**

**PROJECT:**

**NOTES:**

**DESCRIPTION:**


**DELRAY  
LIGHTING  
INCORPORATED**

**WV6100**

BURBANK,  
CALIFORNIA,  
91505  
WWW.  
DELRAY  
LIGHTING.  
COM


### 13W QUAD TUBE

**WV6113**




### 18W QUAD TUBE

**WV6118**




### 26W QUAD TUBE

**WV6126**



### 32W TRIPLE TUBE

**WV6132**



### FOOTCANDLES ON WALL FROM MULTIPLE UNITS

MTG. HT.	FOOTCANDLES			
	n	Units 2' apart		n
2'	18	19	18	
4'	12	13	12	
6'	6	7	6	
8'	9	11	9	
10'	9	10	9	

Units 2 feet from wall and 2 feet apart  
Based on 1-13 watt lamps

MTG. HT.	FOOTCANDLES			
	n	Units 3' apart		n
2'	12	11	12	
4'	9	8	9	
6'	6	7	6	
8'	4	6	4	
10'	4	4	4	

Units 3 feet from wall and 3 feet apart  
Based on 1-13 watt lamps

### NOTES

#### **WV6113.A30**

1-13W quad tube  
G24q-1 electronic socket  
Total lumens: 900  
Efficiency: 16.1%

#### **WV6118.A30**

1-18W quad tube  
G24q-2 electronic socket  
Total lumens: 1250  
FC x 1.4  
Efficiency: 20.2%

#### **WV6126.A30**

1-26W quad tube  
G24q-3 electronic socket  
Total lumens: 1800  
FC x 2.0  
Efficiency: 16.7%

#### **WV6132.A30**

1-32W triple tube  
G24q-3 electronic socket  
Total lumens: 2400  
FC x 2.7  
Efficiency: 15.3%