



6" SINGLE LAMP EYELID WALLWASHER

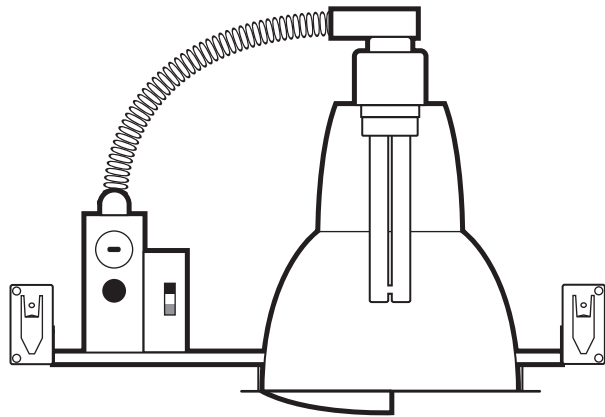

Clear Alzak® Haze
Eyelid Wallwash

SPECIFICATION INFORMATION

HOUSING ASSEMBLY

- Pre-coated galvanized steel mounting frame and J-box.
- Telescopic bar hangers supplied, provides for off-center mounting on joists or T-bar.
- .063 aluminum lampholder securely fastens to reflector, provides thermally efficient operation.
- Self flange type trim for clean, contemporary appearance.
- Ground wire included (prewired).

TWIST LOCK SOCKET

- Push lamp in and twist clockwise to lock into place.
- Lamp will not fall out.
- Relamp with pole (with Changer accessory).

REFLECTOR

- Thirty degree (30°) cutoff.
- Anodized, haze, durable and anti-iridescent.
- Finishes: **A**—Clear Alzak® Haze, and **G**—Wheat Alzak® Haze.

BALLAST

- Standard in universal voltage 120V through 277V.
- Thermally protected rapid start electronic ballasts use 4-pin lamps
- .99 power factor with THD < 10%.
- End of lamp life protection.

ELECTRICAL

- Allows 4-in/4-out #12 AWG conductors rated at minimum 90° C.
- J-box and ballast are both accessible through fixture.
- U.L. listed for use in damp locations.

ACCESSORIES

- **AL**—acrylic food service lens
- **B**—black baffle
- **CHANGER** for re-lamp cup
- **P**—trim flange painted white
- **CP**—Chicago plenum
- **OT6**—white oversize trim ring (adds 5/8" to flange)
- **FS**—inline fuse

DIMMING

- Voltage *must* be specified.
- Controls lumen output down to ±5%.
- Compatible dimmers required for all ballasts.
- **D1** Lutron Compact SE for 18, 26, 32 or 42W lamp.
- **D3** Advance Mark X for 18, 26, 32 or 42W lamp.
- **D4** Lutron Tu-Wire for 26 or 32W lamp. 120V *only*.
- **D5** Advance Mark VII for 18, 26, 32 or 42W lamp.
- **D8** Lutron Hi-Lume for 26 or 32W lamp. Controls lumen output down to ±1%.
- **D9** Lutron Eco System for 26, 32 or 42W lamp.

EMERGENCY

- Voltage *must* be specified.
- **EM** emergency power provides 650 lumens for one lamp for 90 minutes
- **EM13** emergency power provides 1300 lumens for one lamp for 90 minutes

ORDERING INFORMATION

LAMP INFO

- 1-13** 13W quad tube
- 1-18** 18W quad tube
- 1-26** 26W quad tube
- 1-32** 32W triple tube
- 1-42** 42W triple tube

120V ELECTRONIC

- WV6113.A30.1E**
- WV6118.A30.1E**
- WV6126.A30.1E**
- WV6132.A30.1E**
- WV6142.A30.1E**

277V ELECTRONIC

- WV6113.A30.2E**
- WV6118.A30.2E**
- WV6126.A30.2E**
- WV6132.A30.2E**
- WV6142.A30.2E**

SUBMITTAL INFORMATION

TYPE:

PROJECT:

NOTES:

DESCRIPTION:


**DELRAY
LIGHTING
INCORPORATED**

WV6100

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM


13W QUAD TUBE

WV6113




18W QUAD TUBE

WV6118




26W QUAD TUBE

WV6126



32W TRIPLE TUBE

WV6132



FOOTCANDLES ON WALL FROM MULTIPLE UNITS

MTG. HT.	FOOTCANDLES			
	n	Units 2' apart		n
2'	18	19	18	
4'	12	13	12	
6'	6	7	6	
8'	9	11	9	
10'	9	10	9	

Units 2 feet from wall and 2 feet apart
Based on 1-13 watt lamps

MTG. HT.	FOOTCANDLES			
	n	Units 3' apart		n
2'	12	11	12	
4'	9	8	9	
6'	6	7	6	
8'	4	6	4	
10'	4	4	4	

Units 3 feet from wall and 3 feet apart
Based on 1-13 watt lamps

NOTES

WV6113.A30

1-13W quad tube
G24q-1 electronic socket
Total lumens: 900
Efficiency: 16.1%

WV6118.A30

1-18W quad tube
G24q-2 electronic socket
Total lumens: 1250
FC x 1.4
Efficiency: 20.2%

WV6126.A30

1-26W quad tube
G24q-3 electronic socket
Total lumens: 1800
FC x 2.0
Efficiency: 16.7%

WV6132.A30

1-32W triple tube
G24q-3 electronic socket
Total lumens: 2400
FC x 2.7
Efficiency: 15.3%